

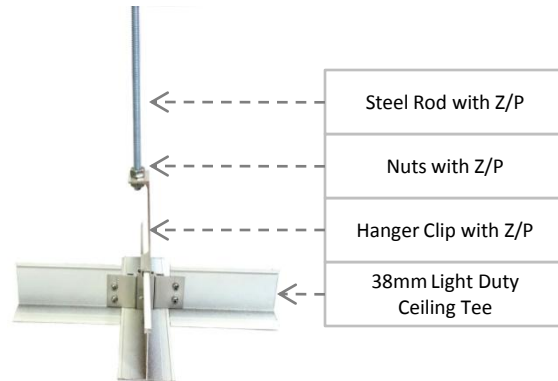


38mm Light Duty Ceiling Grid Systems (LDCG-38)

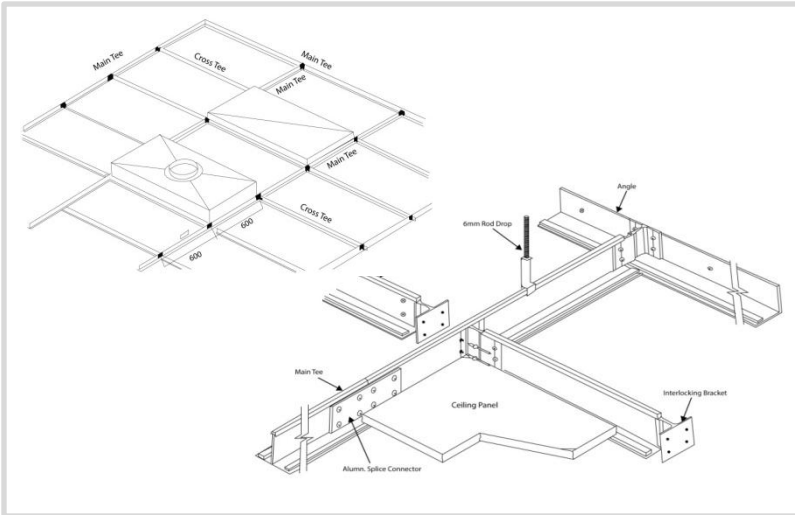

Features

- Light Duty Non-Walkable Ceiling Grid system provides the most comprehensive variety of clean room ceiling solution in the industry
- The system is designed for non-walkable and only able carry lightweight loads.
- Suspension and leveling is by means of M6 hanging rod or high carbon steel wire with rod drop
- Can support fan filter unit on 25% of ceiling area evenly distributed
- The system is non-progressive, demountable, and reusable system with flexible custom to size.
- Systems come with lightweight and solid aluminum profile, combine with other standard accessories, provide strong and lower price ceiling grid structure



Specification

Ceiling Grid	Standard module 600mm x 1200mm, 1200mm x 1200mm
Material	Natural Anodised, Electro-Deposition or Epoxy Powder Coating
Finishing	Extruded aluminium alloy 6063-T5
Point Load (At mid-span of tee)	20kg (Middle of 600mm grid length) 10kg (Middle of 1200mm grid length)
Maximum Permissible Uniform Load for one Suspension/Grid	26kg (Including lighting features, filter, blank panels, etc)